

DEL CONCA

VIGNONI

With its intense color and rich variation, terra-cotta is a timeless option. With Vignoni, Del Conca offers a beautiful terracotta-look with all the advantages of porcelain tile. Available in multiple sizes, including a 3/4" thick paver with a grip finish for exteriors, and enhanced by some unique mosaics, Vignoni brings originality to a product steeped in tradition.


(57)



6 x 12



16 x 32



Mosaico Castiglione



Intreccio Mosaic

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Color

Terracotta DCVG11

Sizes (Non-Rectified)

Please note that each size has a different R rating which makes them suitable for different areas. The 6 x 12 with its R10 B finish is more matte than the 16 x 32 which is R9.

6 x 12 DCVG11/612 (R10 B)

16 x 32 DCVG11/1632 (R9)

3/4" (2cm) Thick Paver

16 x 32 Paver DCVG11/1632P (R11 C)

Mosaics

Intreccio Mosaic DCVG11/IM

Mosaico Castiglione DCVG/MC

Trim

Made from field tile that has been cut, ground and reglazed.

2 x 16 Surface Bullnose DCVG11/SBN

Installation Information

As with all inkjet products, there are many different graphics that are mixed and packed randomly. It is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles ANSI A 108.2 Section 4.3.8. We recommend a minimum 3/16" grout joint.


3/4" (2cm) Thick Paver

With its R11 C rating the 3/4" finish is suitable for most exterior paving applications. Of course, final suitability always comes down to the specific circumstances of the project, and proper cleaning and maintenance is required to maintain the slip resistance of any surface. Properly installed, the 3/4" (2 cm) thick paver can be set on sand, gravel, grass or with a traditional thinset installation. The recommended minimum grout joint for the paver is 3/16". Pedestal applications are also possible with special installation requirements which are available upon request.

Physical Characteristics

Water Absorption	Frost Resistance	Slip Resistance	DCOF
≤ 0,05	Resistant	6 x 12 (R10 B) 16 x 32 (R9) 16 x 32 Paver (R11 C)	Wet ≥ 0.42

The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.

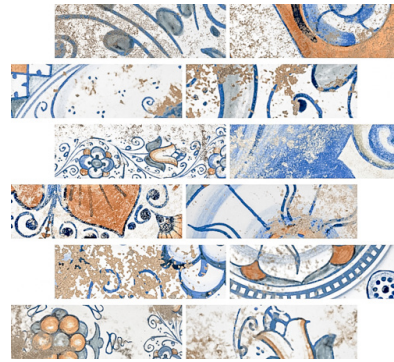

Mosaico Castiglione

A unique mosaic made of approximately 2 x 6 pieces that resemble fragments of faience pottery with its customary white background and colorful patterns. The decorative tiles are randomly mixed and mounted in a brick pattern on an approximately 12 x 12 sheet. The look harkens back to a traditional ceramic product, making this decorative mosaic the perfect accent for Vignoni's rich terracotta color.



Intreccio Mosaic

2 1/2 x 3 inch pieces (cut from 16x32) are mounted to look "interlaced" ("intreccio") creating a woven pattern.

Non-Stock Size

Available and subject to minimum order quantities.

Size (Rectified)

32 x 32 DCVG11/3232